



## Test and Back-Plunger Indicator Holders

Test and back-plunger indicators cannot be used without proper holders. The following pages show the variety of Starrett holders available. This selection should handle virtually any job that needs to be done.

### Magnetic Base Indicator Holder

#### No. 657AA

For use with all Starrett Test, Back-Plunger, AGD, Dial and Miniature-Dial Indicators. Also accommodates similar indicators of other manufacturers.

**A. No. 657P Magnetic Base.** 1-15/16 x 1-5/8 x 1-7/8" (50 x 40 x 48mm). Push-button on/off switch for one-hand operation. Base has three precision ground magnetic contact points. Grips horizontally, vertically, and upside down. V-step holds base to arbors, shafts, etc. Base has extra 1/4-20 tapped hole on one side for mounting post. Black wrinkle finish on non-working surfaces.

**B. No. 657G Upright Base Post.** 3/8" (9.5mm) diameter x 7-7/16" (190mm) length overall. Starrett No. 57S and No. 58S Universal Snugs may also be used.

**C. No. 657S Snug.** Two 1/4" (6.3mm) diameter holes. Adapts Nos. 196, 650, and 651 Series Dial Indicators and No. 657Y Indicator Attachment to No. 657X Rod.

**D. No. 657X Rod.** 1/4" (6.3mm) diameter x 6" (150mm) long. Accommodates Starrett Nos. 708, 709, 811 and 711F Series Dial Test Indicators and No. 657S Sleeve.

**E. No. 657Y Indicator Attachment.** 1/4" (6.3mm) O.D. one end, other end threaded and fits lug backs of all AGD indicators (Starrett Series Nos. 81, 25, 655, 656) and Series No. 80 Miniature Indicators.

**F. No. PT18724 Snug** 3/8" (9.5mm) diameter post hole. 1/4" (6.3mm) diameter gripping hole accommodates No. 657X Rod.


Packed one in a box.



No. 657AA with No. 711FS Last Word Dial Test Indicator.



No. 657Y Indicator Attachment shown with lug-on-center back.

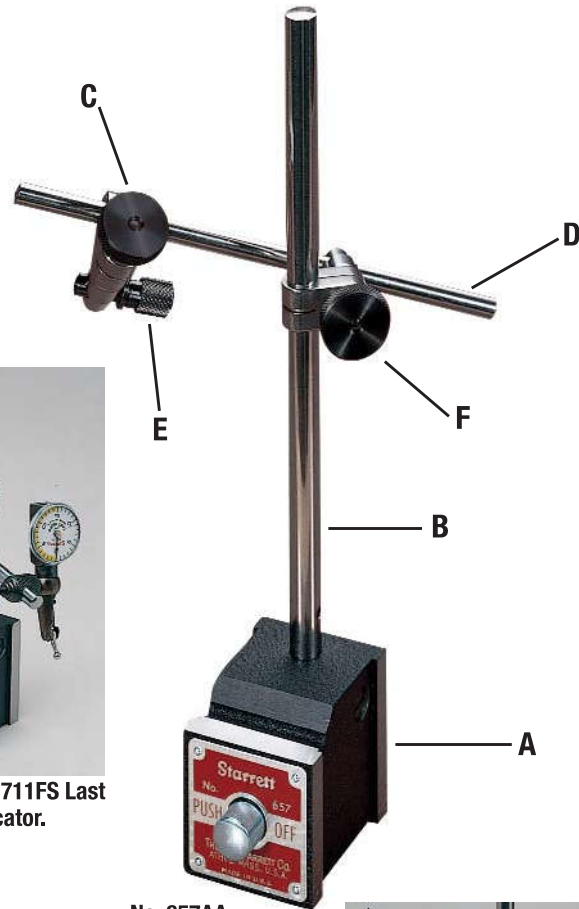

No. 657AA.



Shown with No. 196B1 Universal Dial Indicator.

### Complete Set

Photo Key	Description	Catalog No.	EDP No.
	Magnetic Base with All Attachments – A, B, C, D, E, F	657AA	52743
	Base and Post Assembly with No. 650B1 Indicator, No. 657S Snug, and 3 Contact Points	657-650Z	65259

### Individual Components

A	Magnetic Base Only	657P	52757
B	7 7/16" Upright Base Post Only	657G	52753
C	Snug with Two 1/4" (6.3 mm) Holes	657S	52759
D	Rod	657X	52764
E	Indicator Attachment	657Y	52765
F	Snug Complete – 1/4" and 3/8" Holes	PT18724	50710